


VIEW PRO MANAGER

Guide

- 1. Preparation**
- 2. Network Setting**
- 3. Access to VIEW PRO MANAGER Website**
- 4. Create New Account**
- 5. Register the Device**
- 6. Feature of VIEW PRO MANAGER**


1. Preparation

- Load battery and turn on the device.
- Detach the SIM card Tray from under the USB cover of the splicer
- Insert Nano SIM card to slot on the right side of machine.

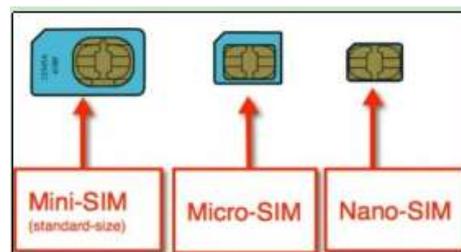

*Only Nano SIM card support

2. Network Setting

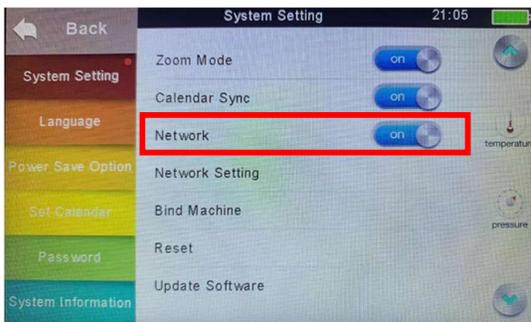


- Go to "System Information"
- Go to second page of System setting
- Check "Network" is ON

- Networks status can be observed on workbench interface
- Check Network and GPS activation icon on work bench (GPS signal is activated at open area)


Icon	Description
	GPS is activated
	GPS is not activated
	Network is activated
	Attempt to activate Network
	No SIM card

- If failed to activate Network, click "Network Setting" and enter the APN information manually

*APN Information is varied depending on your mobile operator

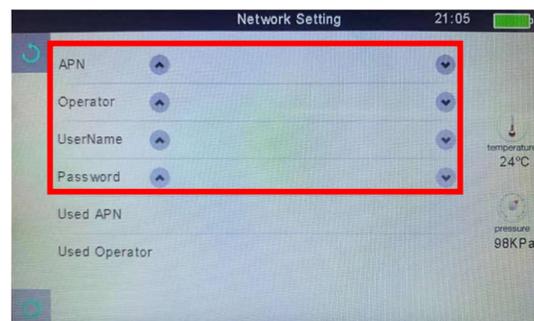


3. Access to the VIEW PRO MANAGER.

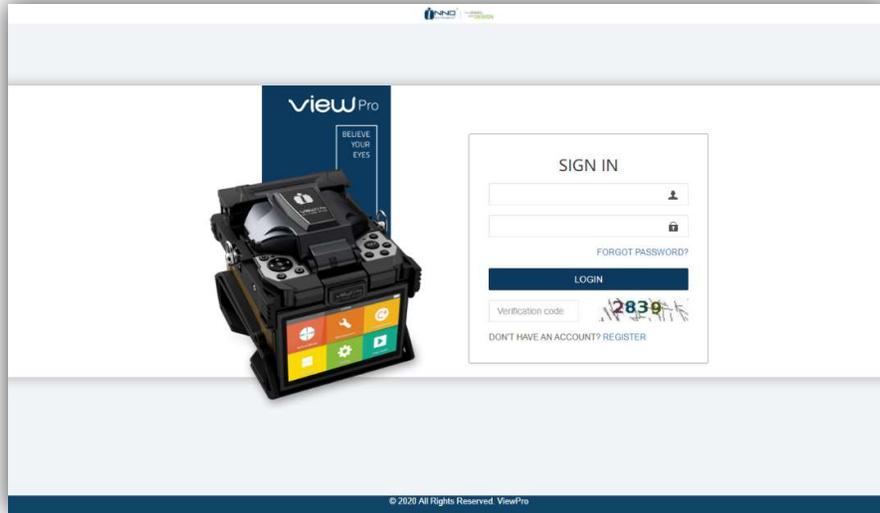


- Enter to View Pro Manager (<https://www.inno-viewpro.com>)

4. Create New Account

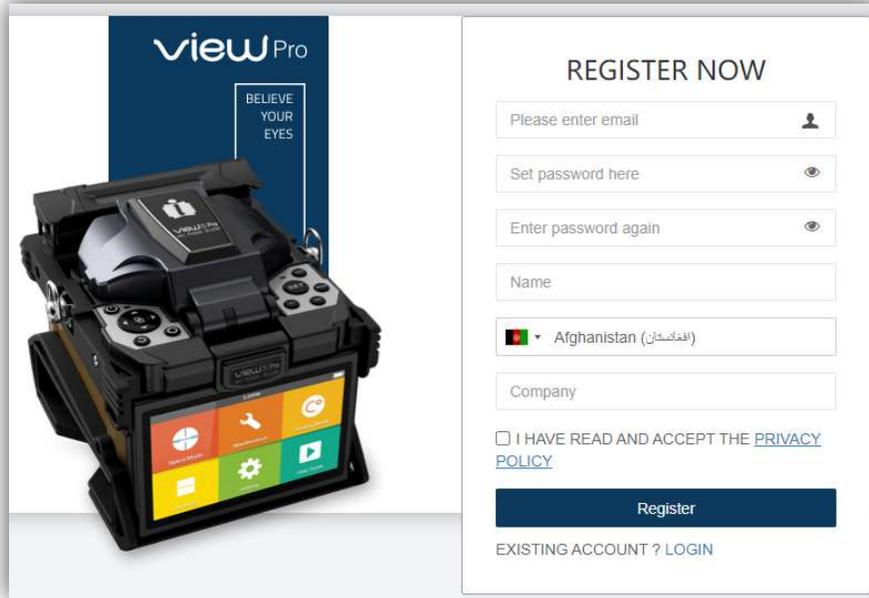

- Create new account with your e-mail address


5. Register the Device

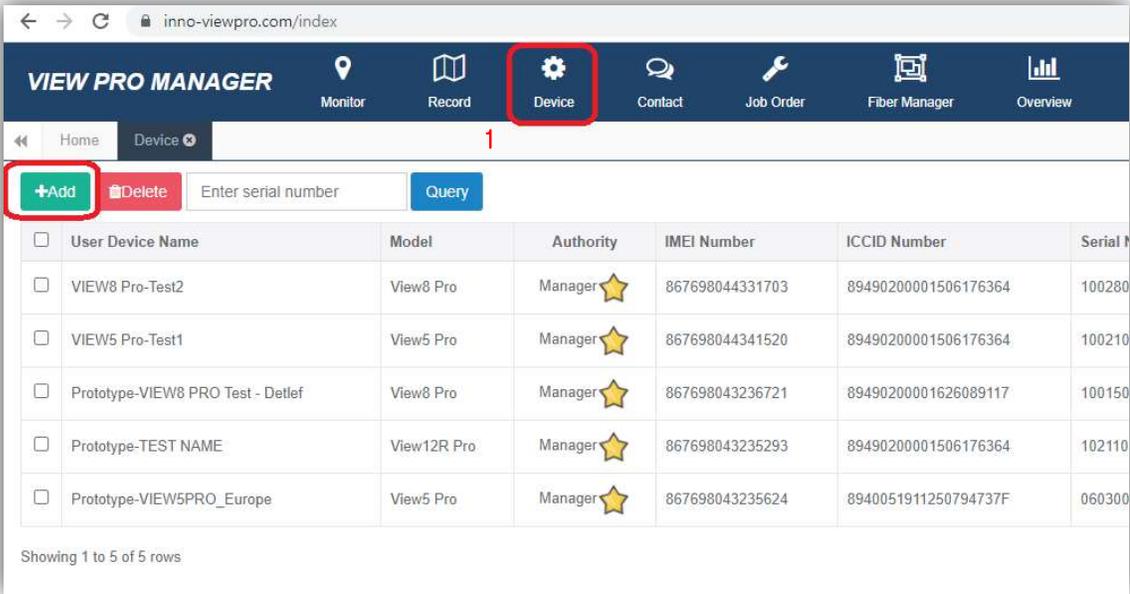

The screenshot shows the 'VIEW PRO MANAGER' web interface. The 'Device' menu item is highlighted with a red box and labeled '1'. Below the navigation bar, the '+Add' button is highlighted with a red box and labeled '2'. A table lists existing devices with columns for User Device Name, Model, Authority, IMEI Number, ICCID Number, and Serial Number.

<input type="checkbox"/>	User Device Name	Model	Authority	IMEI Number	ICCID Number	Serial N
<input type="checkbox"/>	VIEW8 Pro-Test2	View8 Pro	Manager	867698044331703	89490200001506176364	100280
<input type="checkbox"/>	VIEW5 Pro-Test1	View5 Pro	Manager	867698044341520	89490200001506176364	100210
<input type="checkbox"/>	Prototype-VIEW8 PRO Test - Detlef	View8 Pro	Manager	867698043236721	89490200001626089117	100150
<input type="checkbox"/>	Prototype-TEST NAME	View12R Pro	Manager	867698043235293	89490200001506176364	102110
<input type="checkbox"/>	Prototype-VIEW5PRO_Europe	View5 Pro	Manager	867698043235624	8940051911250794737F	060300

Showing 1 to 5 of 5 rows

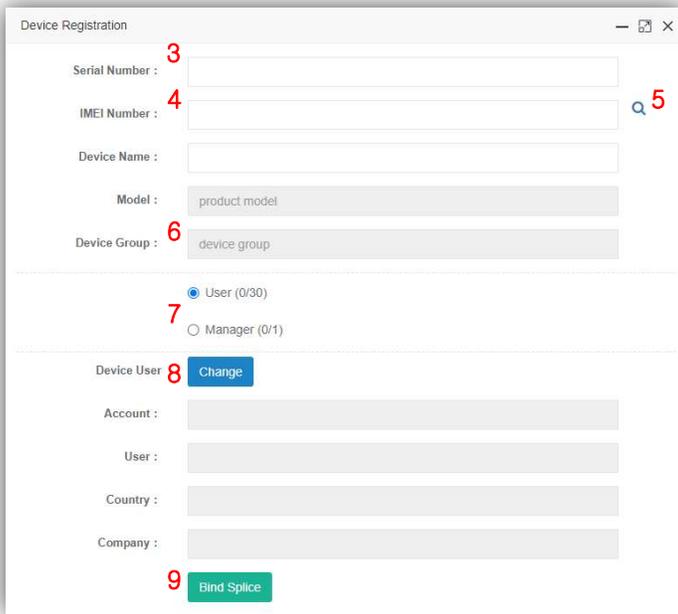

The 'Device Registration' form includes the following fields and steps:

- 3: Serial Number input field
- 4: IMEI Number input field
- 5: Search button (magnifying glass icon)
- Device Name input field
- Model dropdown menu (selected: product model)
- 6: Device Group dropdown menu (selected: device group)
- 7: Authority selection (radio buttons for User (0/30) and Manager (0/1))
- 8: Change button
- Account, User, Country, and Company input fields
- 9: Bind Splice button

- 1) Go to "Device" menu
- 2) Click "Add" button
- 3) Enter the Serial Number
- 4) Enter the IMEI Number
- 5) Click  button
- 6) Select Device Group
- 7) Select Your Authority
- 8) Click "Change"
- 9) Click "Bind Splice"

- * Serial number & IMEI number can be found on system information
- * Manager Authority : Able to delete a User and Lock the splicer remotely
- User Authority : Only available to access for device data

- 10) Go to "System Setting" of Splicer
- 11) Click "Bind Machine"



- 12) Splicer is now registered on VIEW PRO MANAGER cloud

6. Feature of VIEW PRO MANAGER

● **Monitor**

2

4


5

3

No.	Date	Time	Name	User Account	Model	Estimate Loss	Splice Mode	Left Angle	Right Angle	Location	S/N
No matching records found											

- 1) Device list with status icons (electrode warning, battery, SW version).
* Default grouping cannot be deleted.
- 2) Add/Remove group, group management.
- 3) Splice data of selected devices (User, Model, Estimated loss, Location, etc).
- 4) Select the period to search splice data
- 5) Current device location with device information (location, name, model, etc).

● **Record**

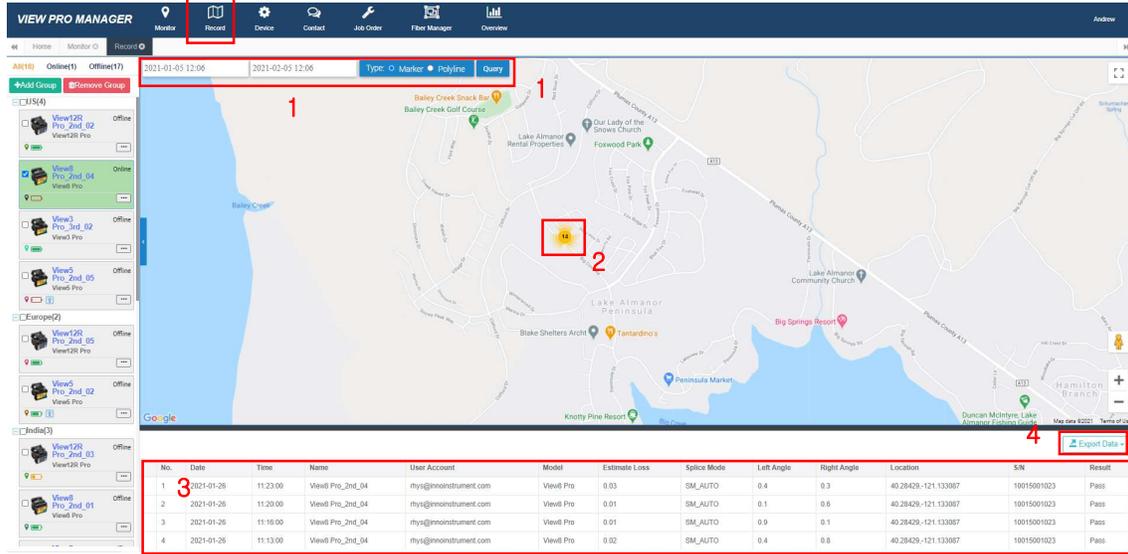

No.	Date	Time	Name	User Account	Model	Estimate Loss	Splice Mode	Left Angle	Right Angle	Location	S/N	Result
1	2021-01-25	11:23:00	View6 Pro_2nd_04	rhyis@innoinstrument.com	View6 Pro	0.03	SM_AUTO	0.4	0.3	40.28429-121.133087	10015001023	Pass
2	2021-01-25	11:20:00	View6 Pro_2nd_04	rhyis@innoinstrument.com	View6 Pro	0.01	SM_AUTO	0.1	0.6	40.28429-121.133087	10015001023	Pass
3	2021-01-25	11:16:00	View6 Pro_2nd_04	rhyis@innoinstrument.com	View6 Pro	0.01	SM_AUTO	0.9	0.1	40.28429-121.133087	10015001023	Pass
4	2021-01-25	11:13:00	View6 Pro_2nd_04	rhyis@innoinstrument.com	View6 Pro	0.02	SM_AUTO	0.4	0.8	40.28429-121.133087	10015001023	Pass

- 1) Period selection and data type for selected devices.
 - Marker: Splice point with count information on the map.
 - Polyline: Travel route of the device on the map.
- 2) Splice point with count information.
- 3) Splice data in detail for selected period.
- 4) Available to export filtered splice data into excel file.
 - Location of device which has no previous GPS record is saved to "0, 0".

- More Introduction and guidance can be found in "HELP" under account menu. (Under developing)

