

RG-RAP6262(G)

Reyee Wi-Fi 6 AX1800 Outdoor Omni-directional Access Point

DATASHEET



Highlights

- 'UFO' design, a perfect blend of Wi-Fi 6 technology and artwork
- IP68 protection, rock-solid in harsh environments
- Omni-directional coverage with long range
- Easily add extra outdoor Wi-Fi with Reyee Mesh
- Rack-separated mounting design, easily installation on high

Highlight Features

A Perfect Blend of Wi-Fi 6 Technology and Artwork



Wi-Fi 6
1775Mbps



'UFO'
Design



Reyee Mesh
Technology



Free Cloud
Management

Rock-solid in Harsh Environments

Adopts completely sealed, waterproof, dustproof, moisture proof and flame-retardant, wind erosion protection, Wide Temperature range, and 4kV surge protection design.



IP68
Protection



4kV Lighting
Protection



Wind Erosion
Protection




-30°C ~ 65°C
Flame-Retardant

Highlight Features

Omni-directional Coverage with Long Range

Built-in 4 high gain antennas, supports full coverage with radius of 100 meters at 2.4GHz, and 300 meters at 5GHz*.

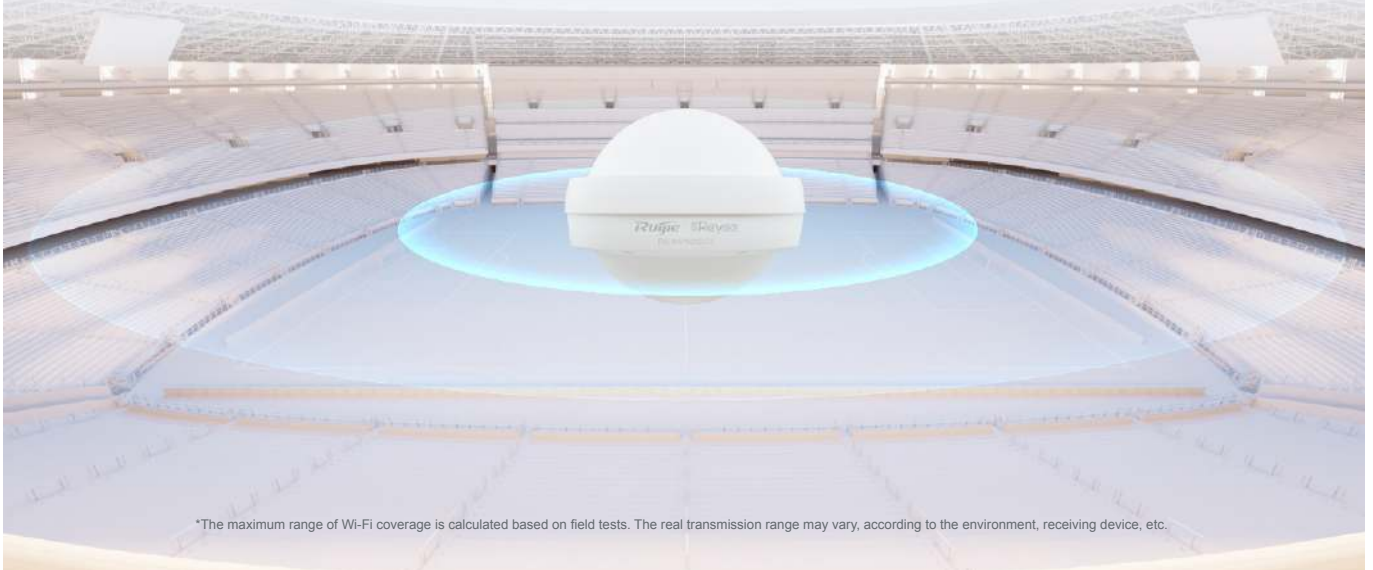

*The maximum range of Wi-Fi coverage is calculated based on field tests. The real transmission range may vary, according to the environment, receiving device, etc.

Easily Add Extra Outdoor Wi-Fi with Reyee Mesh

Less wiring, more relaxing



Highlight Features


Easy Installation, Firmly Fixed

Rack-separated mounting design, easily installation on high. Replace plastic cable ties by iron hoop.



Cloud, Make Your Business Easy

- Remote monitoring
- Remote Wi-Fi management
- Cloud portal authentication
- Wireless intelligent optimization

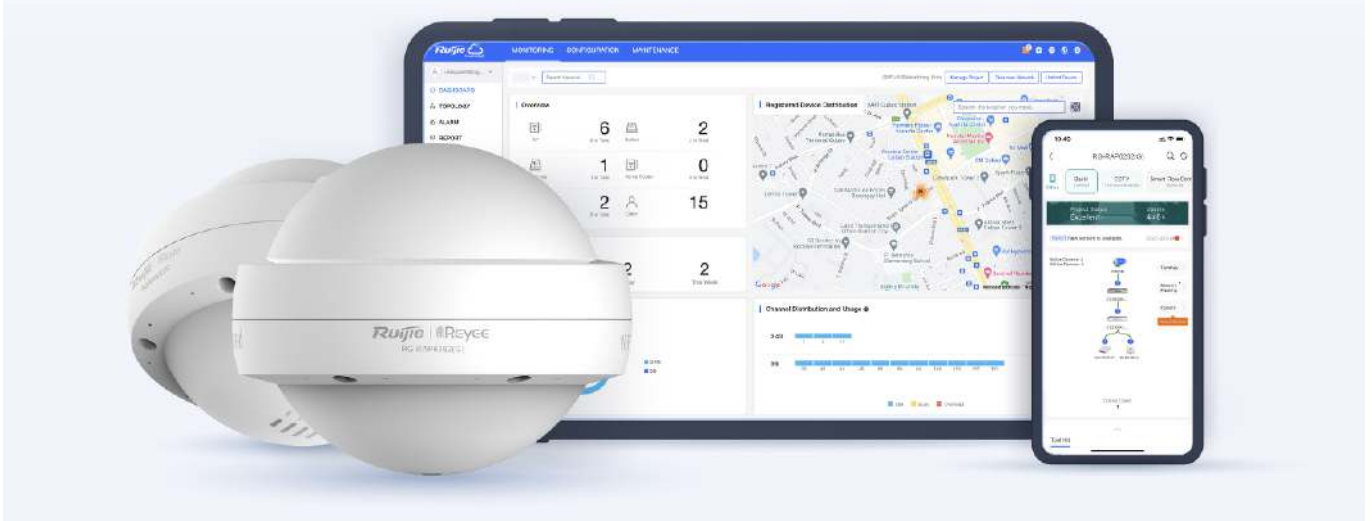

Specifications

Basic Feature

Wi-Fi Standards	Wi-Fi 6 (IEEE 802.11ax) Wi-Fi 5 (IEEE 802.11ac Wave2) Wi-Fi 4(IEEE 802.11n)
RF Design	2.4 GHz, 2 × 2, MU-MIMO 5 GHz, 2 × 2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 1201 Mbps
Antenna	4
Antenna Type	Built-in Omnidirectional
Antenna Gain	2.4 GHz: 3 dBi 5 GHz: 4 dBi
Transmit Power	EIRP ≤ 26 dBm(2.4 GHz) ≤ 25 dBm(5 GHz) country-specific restrictions apply Myamar: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5850 MHz ≤ 25 dBm Thailand: 2400 MHz~2483.5 MHz ≤ 20 dBm 5150 MHz~5350 MHz ≤ 23 dBm 5470 MHz~5725 MHz ≤ 25 dBm 5725 MHz~5850 MHz ≤ 30 dBm
Fixed Ports	2 × 10/100/1000 Base-T
Max. Clients	256
Recommended Clients	100
Max. SSIDs	8

Software Feature

WLAN Basic Features

SSID Hiding	✓
Power Adjustment	✓
Roaming	Layer 2 Roaming Layer 3 Roaming

Specifications

Software Feature	
WLAN Basic Features	
OFDMA	✓
Target wake time (TWT)*	✓
WMM	✓
Radar Signal Detection and Frequency Hopping	✓
WLAN Security	
Security Mode	WPA-PSK, WPA2-PSK, WPA/WPA2-PSK;
Blacklist and Whitelist	✓
Enhanced User Experience	
Wi-Fi Optimization	✓
Automatic RF adjustment via the platform	✓
User Isolation	Layer 2 User Isolation
STA limit	✓
Removing Low-RSSI STAs	✓
Configuring STAs' RSSI Threshold	✓
Average Speed Threshold	✓
Adjusting Sending Rate of Beacon and Probe Response	✓
Syslog Recording Why Users Lose Connection	✓
Auto Channel and Power Adjustment on Cloud	✓
RSSI Threshold for STA Access	✓
Quick channel adjustment (auto channel selection)	✓

Specifications

Software Feature

Networks

Network Access Mode

DHCP Client

VLAN

✓

System

Cloud Management

✓

App Management

✓

App Upgrade

✓

App Restart

✓

Scheduled Restart

✓

Local Upgrade

✓

Online Upgrade

✓

Factory Reset

✓

WLAN Features

Frequency Bandwidth

2.4 GHz: 20/40 MHz
5 GHz: 20/40/80 MHz

Recommended Wi-Fi
Coverage Radius

2.4 GHz: 50m, 5 GHz: 150m

Max. Wi-Fi Coverage Radius

2.4 GHz: 100m, 5 GHz: 300m

Operation Frequency Bands

802.11b/g/n/ax: 2.400 GHz to 2.483 GHz
802.11a/n/ac: 5.150 GHz to 5.350 GHz
802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz
country-specific restrictions apply

Receive Sensitivity

Physical

LED Indicator

3 × System LED Indicator

Buttons

1 × Reset Button

Specifications

Physical

Dimensions (W x D x H)	200 mm × 220 mm × 166 mm (Without Mounting Bracket)
------------------------	---

Weight	1.2 kg (Without Mounting Bracket)
--------	-----------------------------------

Power

Power Supplies	IEEE 802.3at PoE DC 12V/1.5A
----------------	---------------------------------

Power Consumption	≤ 18W
-------------------	-------

DC Port Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 10 mm
--------------------	---

Environmental

Operating Temperature	-30°C to 65°C
-----------------------	---------------

Storage Temperature	-40°C to 85°C
---------------------	---------------

Operating Humidity	0% to 100% (Noncondensing)
--------------------	----------------------------

Storage Humidity	0% to 100% (Noncondensing)
------------------	----------------------------


IP(Ingress Protection)	IP68
------------------------	------

Port Surge	4 kV
------------	------


MTBF	>250000H
------	----------

Antenna Schematic

2.4GHz Pattern:

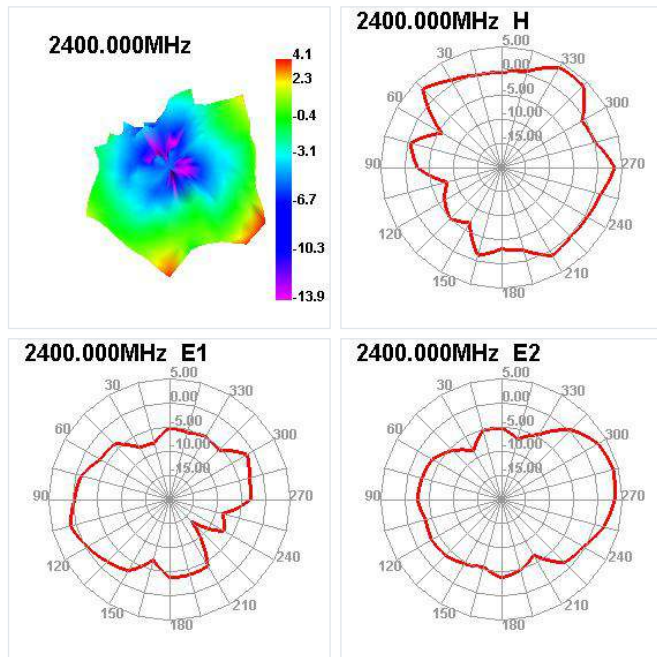

5GHz Pattern:

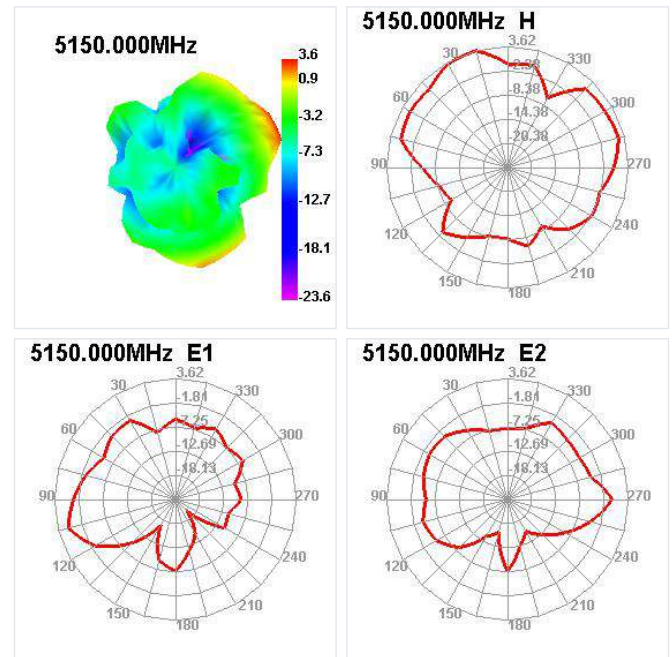

Package Contents

Package Information	RG-RAP6262(G)
RG-RAP6262(G) Access Point	1
User Manual	1
Pole Clamps	2
Mounting Plate	1
Expansion Bolts (M8*60)	4
M8*20 Screws	2
Cable Glands (Pre-installed)	2
Connecting Rod (Pre-installed)	1
Warranty Card	1
Package Weight	2.94 kg
Package Dimension (w x d x h)	466 mm x 257 mm x 217 mm

Ruijie | Rcycc

 **Redefine your easy network**

Copyright ©2000-2022 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd
Floor 11, East Wing, Zhongyipengao Plaza,
No.29 Fuxing Road, Haidian District, Beijing China
Website: <https://www.ruijienetworks.com>