



## TOP VIEW

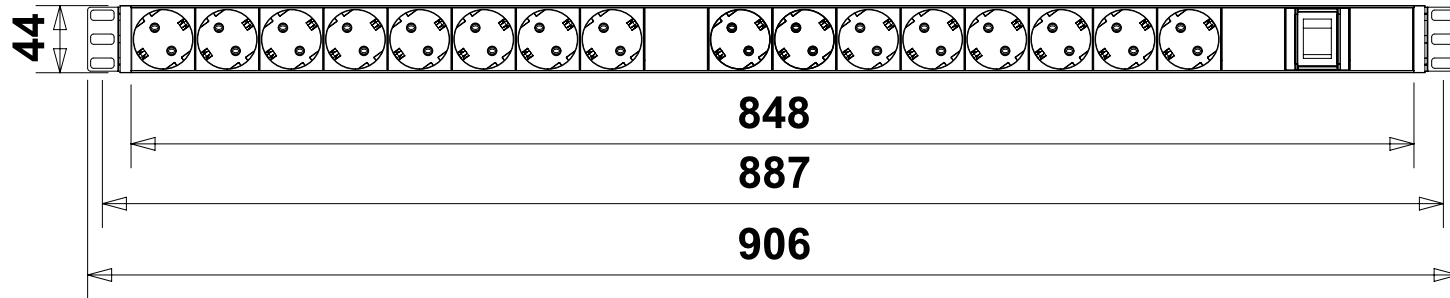

## SIDE VIEW



Socket Type	: DIN49440
Socket Quantity	: 16 x DIN 49440
Plug	: DIN49441 (CEE 7/7)
Inner Circuit	: Unipolar
Rating Voltage	: 250VAC 50/60Hz. (P-N)
Max.Power	: 4000 Watt
Safety Authent.	: CE
Rating Current	: 16A (ON-OFF SWITCH)
Monitoring	: None
Colour	: Black plastic & Grey Alum.
Material	: Aluminium Housing
Power Input	: Right Side
Cable Spec.	: 1.5m 3X1.5mm2

**CANOVATE**

Environmental  
 Elevation (AMSL):  
 Operating 0 to 3000 m  
 Storage 0 to 15 000m  
 Temperature:  
 Operating 0 to 45° C  
 Storage -25 to 65° C  
 Protection IP20

NOTE: FIXING SET IS INCLUDED

**PB-S16-100-116-1A1F**

0U PDU 16 X DIN 49440 + ON-OFF LIGHTED SWITCH  
 1.5m H05VVF 3G 1.5mm2 CABLE WITH CEE 7/7 PLUG

SIZE A4	APPROVAL: B. E.	DRAWING NO: PB-S16-100-116-1A1F	REV. 0
SCALE 1:5	23.12.2022	tol. ±1mm / all dimensions are mm	