

**NOTES:**

**ELECTRICAL:**


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

**ENVIRONMENTAL:**

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

**MECHANICAL:**

1. HOUSINGMATERIAL:PBT;
2. SHIELDMATERIAL:STAINLESSSTEEL, T=0.2mm
3. PANELFRAME:CARBONSTEEL, POWDER, COATINGINBLACKCOLOR, Spec1.5mm;
4. PCBMATERIAL:FR-4T=1.6mm;
5. IDC MATERIAL:PC, CONTACT:PHOSPHORBRONZE; WITHNICKELPATING;
6. RJ45JACKLIFE:750TIMESMIN;
7. IDC LIFE:200TIMESMIN;
8. WIRE:AWG22-26;

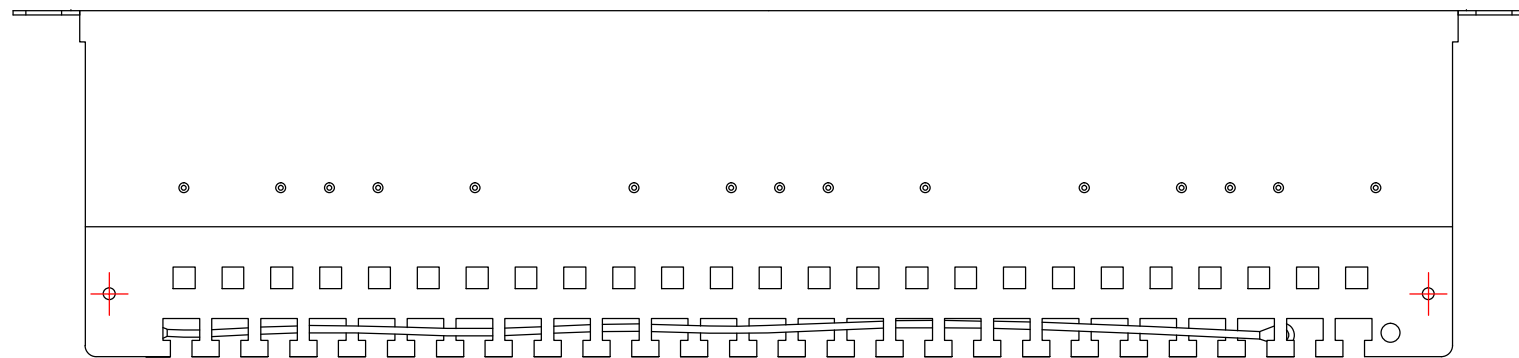

					Solarstar Electronics Industrial Co., Ltd.					
SYM	Number	BillNo. of Alteration	Signature	Date	Material				ItemNo.	SS-PP5S24P
					Angles Projection	Size	Scale	Unit		
Drawn	Dingjianbo	2016.1.13	Tolerance			A4	X:1	mm	PartName	24PortsCat5eSTPPatchPanel
Checked	Gepeijun	2016.1.13	0.00-20.00 ±0.10	20.00-50.00 ±0.15					ERP	
Approved	Wangweijun	2016.1.13	50.00-100.00 ±0.20	100.00-Angle ±0.25	Sheet	10F1	Version: A/0	PartNo.		