




8 7 6 5 4 3 2 1

LENGTH±T

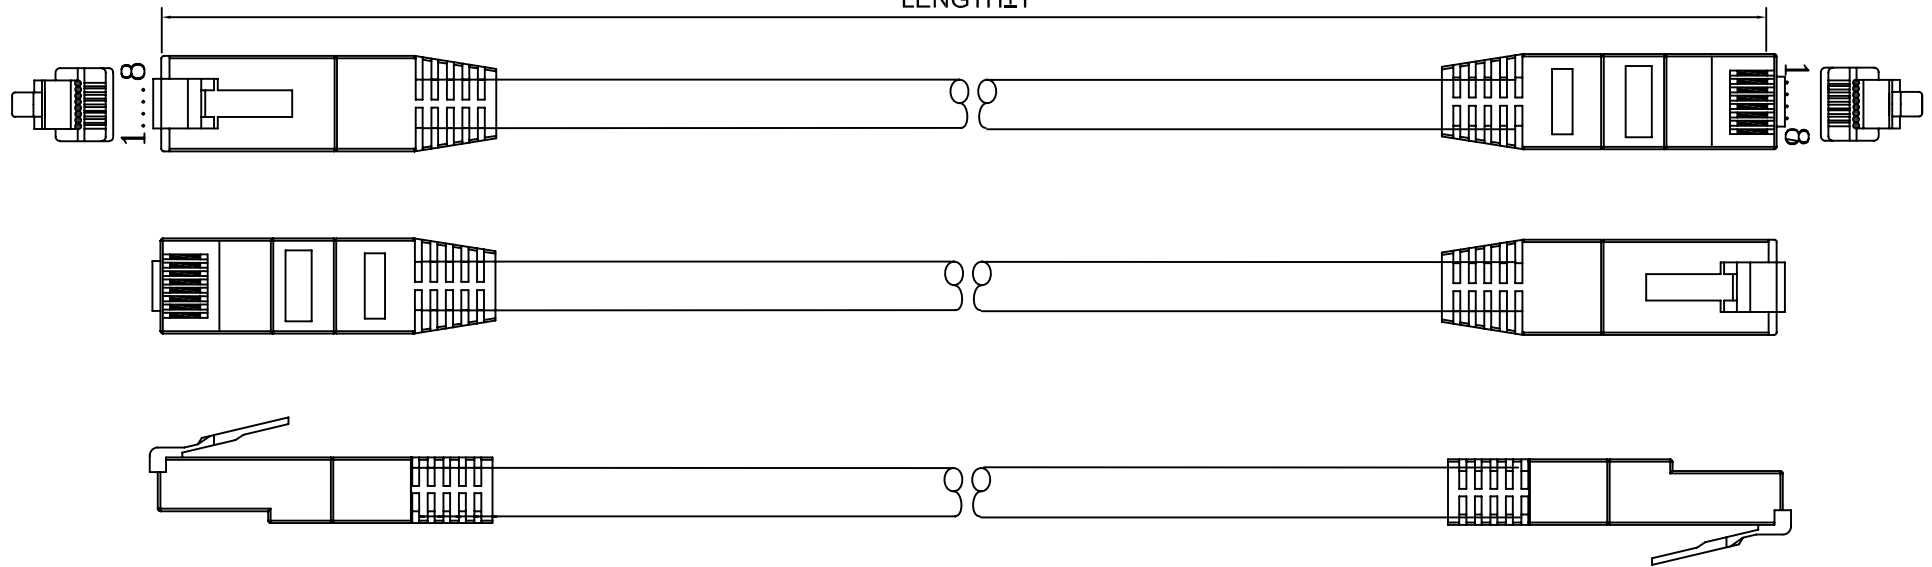

WIRING PIN ASSIGNMENT:

P1 EIA/TIA 568-B.2 P2

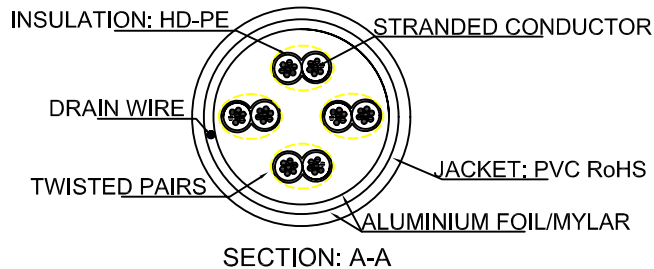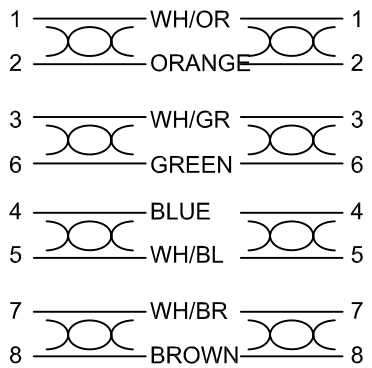

CAT5E FTP CABLE		
PART No.	LENGTH	TOLERANCE
	500	±15
	1000	±20
	2000	±25
	3000	±25
	5000	±30

- NOTE:
- 100% OPEN/SHORT, MISSWIRING AND INTERMITTENCE TEST
 - RoHS COMPLIANT, ALL MATERIAL AND PROCESS MUST MEET THE REQUIREMENT OF RoHS
 - 100% PASS 300V HIGH VOLTAGE TEST



X.± 1	X.°± 1
.X± 0.3	.X°±
.XX± 0.20	.XX°±
.XXX± 0.100	.XXX°±
UNITS: mm	

TEST DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIDER CABLE AND SHALL NOT BE REPRODUCED COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIDER CABLE.

APPD: STEVEN		TITLE: CAT5E FTP Patch Cable		
CHKD: JENNY Tsang		RoHS COMPLIANT		
DRAW: SIMON Ng		DATE: 2016.11.08		
		SCALE	SHEET	REV.
		1:1	1/1	C

ITEM	DESCRIPTION	QTY	UNIT
4	CONNECTOR 8P8C RJ45, 1µ GOLD PLATED AT CONTACT AREA IRONCLAD SHELL NICKEL PLATE	2	PCS
3	OVERMOLD INJECTION 60P PVC	A/R	
2	PRINTING XXXXXXXXXXXX	A/R	
1	RAW CABLE CAT5E FTP CABLE 26AWG 7/0.16CCA*4P		

8 7 6 5 4 3 2 1