

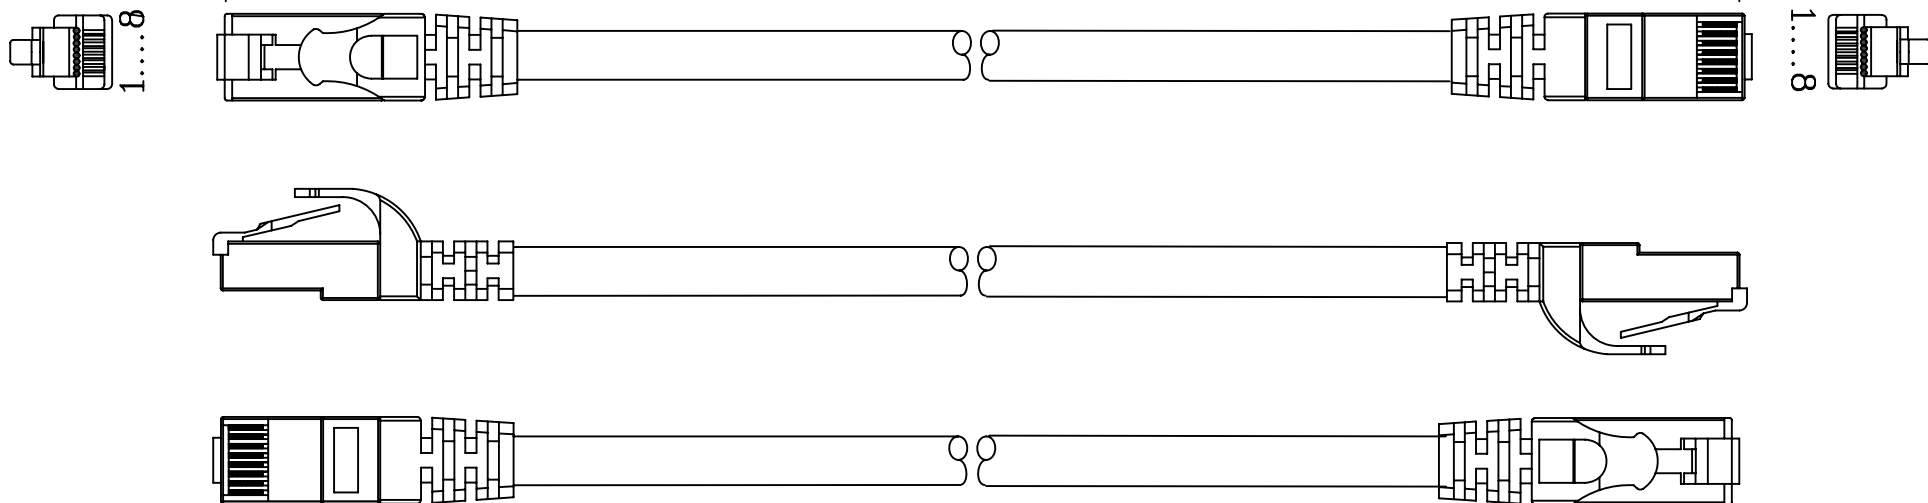


8 7 6 5 4 3 2 1

LENGTH±T

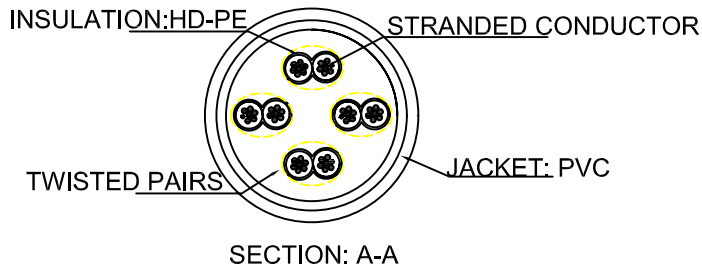

WIRING PIN ASSIGNMENT:

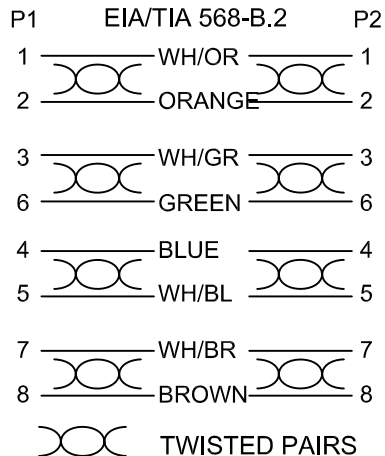


- NOTE:
- 100% OPEN/SHORT, MISSWIRING AND INTERMITTENCE TEST
  - RoHS COMPLIANT, ALL MATERIAL AND PROCESS MUST MEET THE REQUIREMENT OF RoHS
  - 100% PASS 300V HIGH VOLTAGE TEST

CAT5e UTP CABLE		
PART No.	LENGTH	TOLERANCE
	300	±15
	500	±15
	1000	±20
	2000	±25
	5000	±25
	10000	±30

X.± 1	X.°± 1
.X± 0.3	.X°±
.XX± 0.20	.XX°±
.XXX± 0.100	.XXX°±
UNITS: mm	

TEST DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIDER CABLE AND SHALL NOT BE REPRODUCED COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIDER CABLE.

4	CONNECTOR	8P8C RJ45, 1μ GOLD PLATED AT CONTACT AREA	2	PCS
3	OVERMOLD	INJECTION 60P PVC	A/R	
2	PRINTING	XXXXX	A/R	
1	RAW CABLE	CAT5e UTP CABLE 26AWG 7/0.16CCA*4P		
ITEM	DESCRIPTION			Q'TY UNIT

APPD: STEVEN		TITLE: CAT5e UTP Patch Cable		
CHKD: JENNY Tsang		RoHS COMPLIANT		
DRAW: SIMON Ng		DATE: 2016.11.08		
		SCALE	SHEET	REV.
		1:1	1/1	C

8 7 6 5 4 3 2 1