

**NOTES:**

**ELECTRICAL:**


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

**ENVIRONMENTAL:**

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

**MECHANICAL:**

1. HOUSING MATERIAL: PBT;
2. SHIELD MATERIAL: STAINLESS STEEL, T=0.2mm
3. PANEL FRAME: CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spcc1.5mm;
4. PCB MATERIAL: FR-4 T=1.6mm;
5. IDC MATERIAL: PC, CONTACT: PHOSPHOR BRONZE; WITH NICKEL PLATING;
6. RJ45 JACK LIFE: 750 TIMES MIN;
7. IDC LIFE: 200 TIMES MIN;
8. WIRE: AWG22-26;

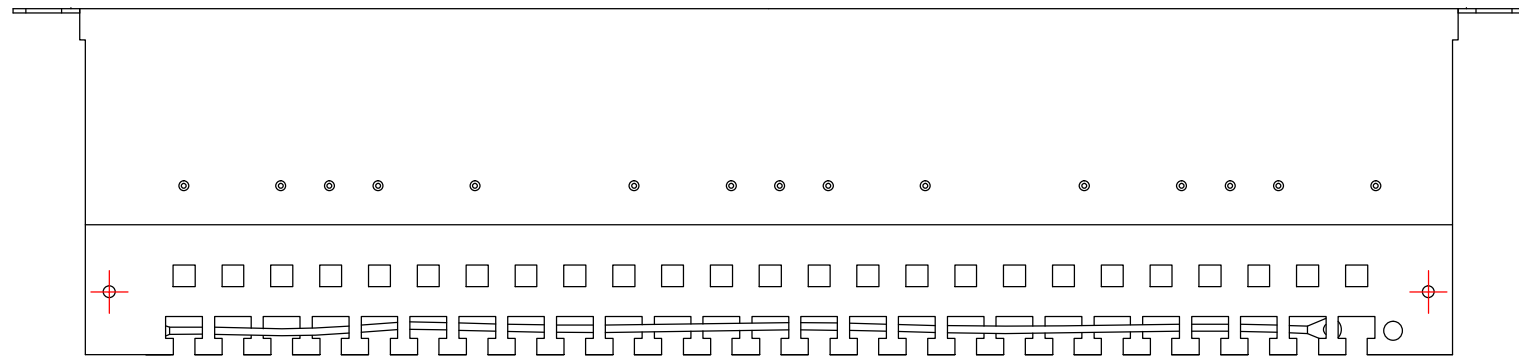

					Solarstar Electronics Industrial Co., Ltd.				
					Material			ItemNo.	SS-PP6-14
					Angles Projection			PartName	24PortsCat6STPPatchPanel
					Size			ERP	
					Scale			PartNo.	
					Unit				
					A4				
					X:1				
					mm				
					Version: A/0				
Drawn	Dingjianbo	2016.1.13	Tolerance			Sheet	10F1	Version: A/0	
Checked	Gepeijun	2016.1.13	0.00-20.00	±0.10					
Approved	Wangweijun	2016.1.13	20.00-50.00	±0.15					
			50.00-100.00	±0.20					
			100.00-	±0.25					
			Angle	±30'					