


LCUPC OM3 Pigtail

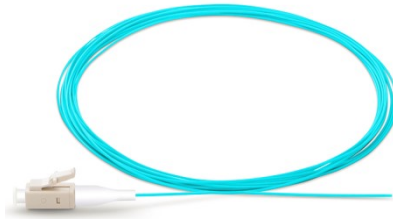

Description

Fiber Optic Pigtail widely used in optical distribution frame, terminal box, indoor and outdoor fiber optic cable transfer box and other fiber optic communication equipment instrument.

Features

- ◆ Lower Insertion Loss
- ◆ High Return Loss
- ◆ Excellent Repeatability
- ◆ Environmentally Stable
- ◆ Cable diameter:Φ0.9

Application

- ◆ Telecom and Datacom
- ◆ 2.Storage Network
- ◆ CATV & Multimedia Application
- ◆ Systems Integration for Long Haul, Metro and Access Network
- ◆ Fiber to the Indoor (FTTX) Test
- ◆ Local Area Network(LAN)

Items	Unit	Single mode
Connector		LCUPC
Return loss	dB	>20
Insertion loss	dB	≤0.3
Cable diameter	mm	Φ0.9
Repeatability	dB	≥1000(metal); ≥500(nonmetal)
Durability	Mating	40

Packing information

Model	N.W. (kgs)	G.W. (kgs)	Standalone Size(cm)	Pcs/ Carton	CartonDimension(cm)
JHT-xxxx	16	17	/	500	55*38*26cm

Ordering information

Name	Model	Details
Fiber Optic Pigtail	JHT-xxxx	LCUPC connector OM3 fiber optic pigtail