


GJXH

Feature

- ◆Fiber-to-the-home broadband connections promise the next generation in connectivity to consumers.
- ◆One action stripping, flexible cable.
- ◆Operating Temperature : -40~+60°C

Structure

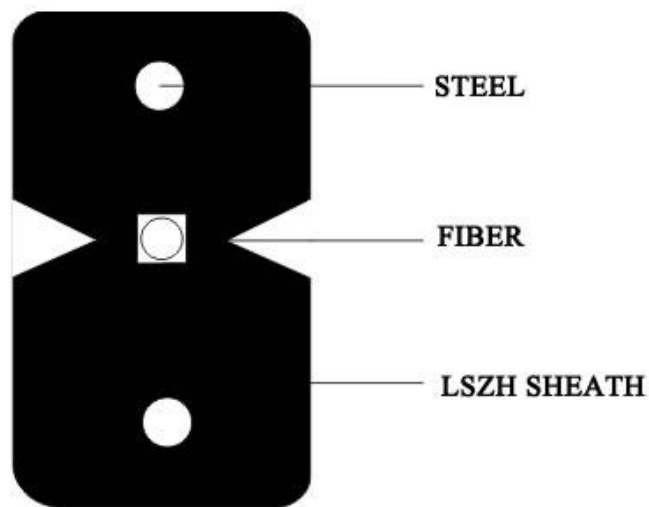

Technical Parameter

Cable Count	Out sheath Diameter	Weight (KG)	Minimum allowable Tensile Strength (N)		minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)		Storage temperature (°C)
	(MM)		short term	long term	short term	long term	short term	long term	
1	3.1*2.0	8	600	200	1000	300	20D	10D	40

Optical Characteristics:

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber	
			A1b:62.5/125		
	Singlemode	G.652(A, B, C)		B1.1:Conventional fiber	
		G.652D		B2: Zero dispersion shifted	
		G.655		B1.2 :Cut-off wavelength shifted	
G.657 (A1, A2, B3)		B4: Main technical data for positive dispersion shifted single-mode fiber			

Application

- ◆FTTx/FTTH indoor application
- ◆The optical fiber cable contains 1/2/4 core single mode optical fiber.