

REV	DATE	MODIFICATION	DRAWN

SPECIFICATIONS

1. ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX. AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 500 MEGOHMS.
TERMINATION: RESISTANCE 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
DURABILITY: 200 MATING CYCLES.

3. MATERIAL & FINISH:

HOUSING: POLYCARBONATE: U194V-0 OR U194V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: PHOSPHOR BRONZE
CONDUCTOR: STRANDED & SOLID WIRE. 24AWG, 26 AWG.
GOLD PLATING: 3u"~50u" ARE AVAILABLE

规范

1. 电器:

UL 应用最大250VOLT TS AC.
介质耐电压伏特数: 500VOLT TS AC.
绝缘阻抗: 500 百万欧姆.
终端阻抗: 在环境测试后最大可承受35 万欧姆终端阻抗


2. 机构

拉力测试: 至少19.6N/PCS.
耐力测试: 至少200 次之插拔测试

3. 材质表面处理

塑胶壳: 聚碳酸酯, UL-94V-0 or UL94V-2.
颜色: 透明, 或者其他颜色亦可
金片: 磷铜片.
导体: 多股线&单股线, 24AWG, 26AWG.
镀金厚度: 3u"~50u", 皆可提供

客户用产品图

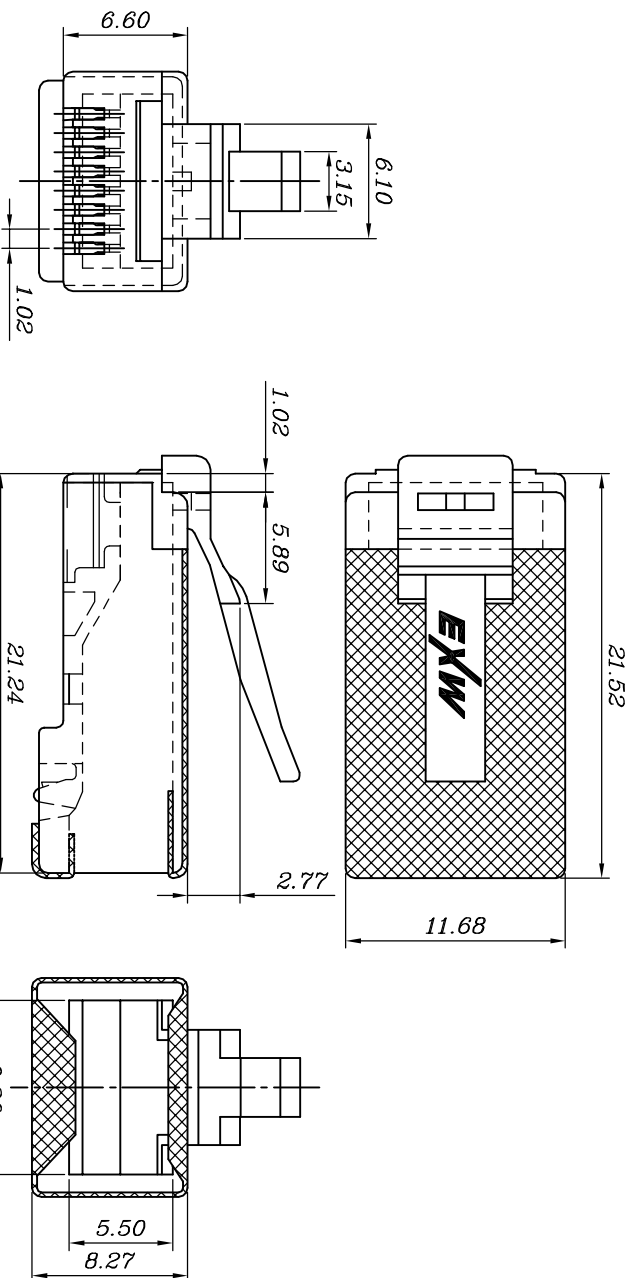

ITEM: _____

BLADE:	E	Y	Z	A	YL	ZL
Drawing						
Mark						
GOLD PLATING	3u"	6u"	15u"	30u"	50u"	
Mark						

EXW 宁波卓新通讯接插件有限公司 NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD	
DIMENSION IN mm (inch)	材 质
TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL
.XX±0.20	PC
.XX±0.10	PLUG-054-EXW
.XX±2°	名称
TITLE	P88R5Z50V2S1T
审核	制图
APPROVAL	DRAWN
核 对	Lucia
CHECKED	比例 5/2
	张数 1/1
	更改 REV
	A