


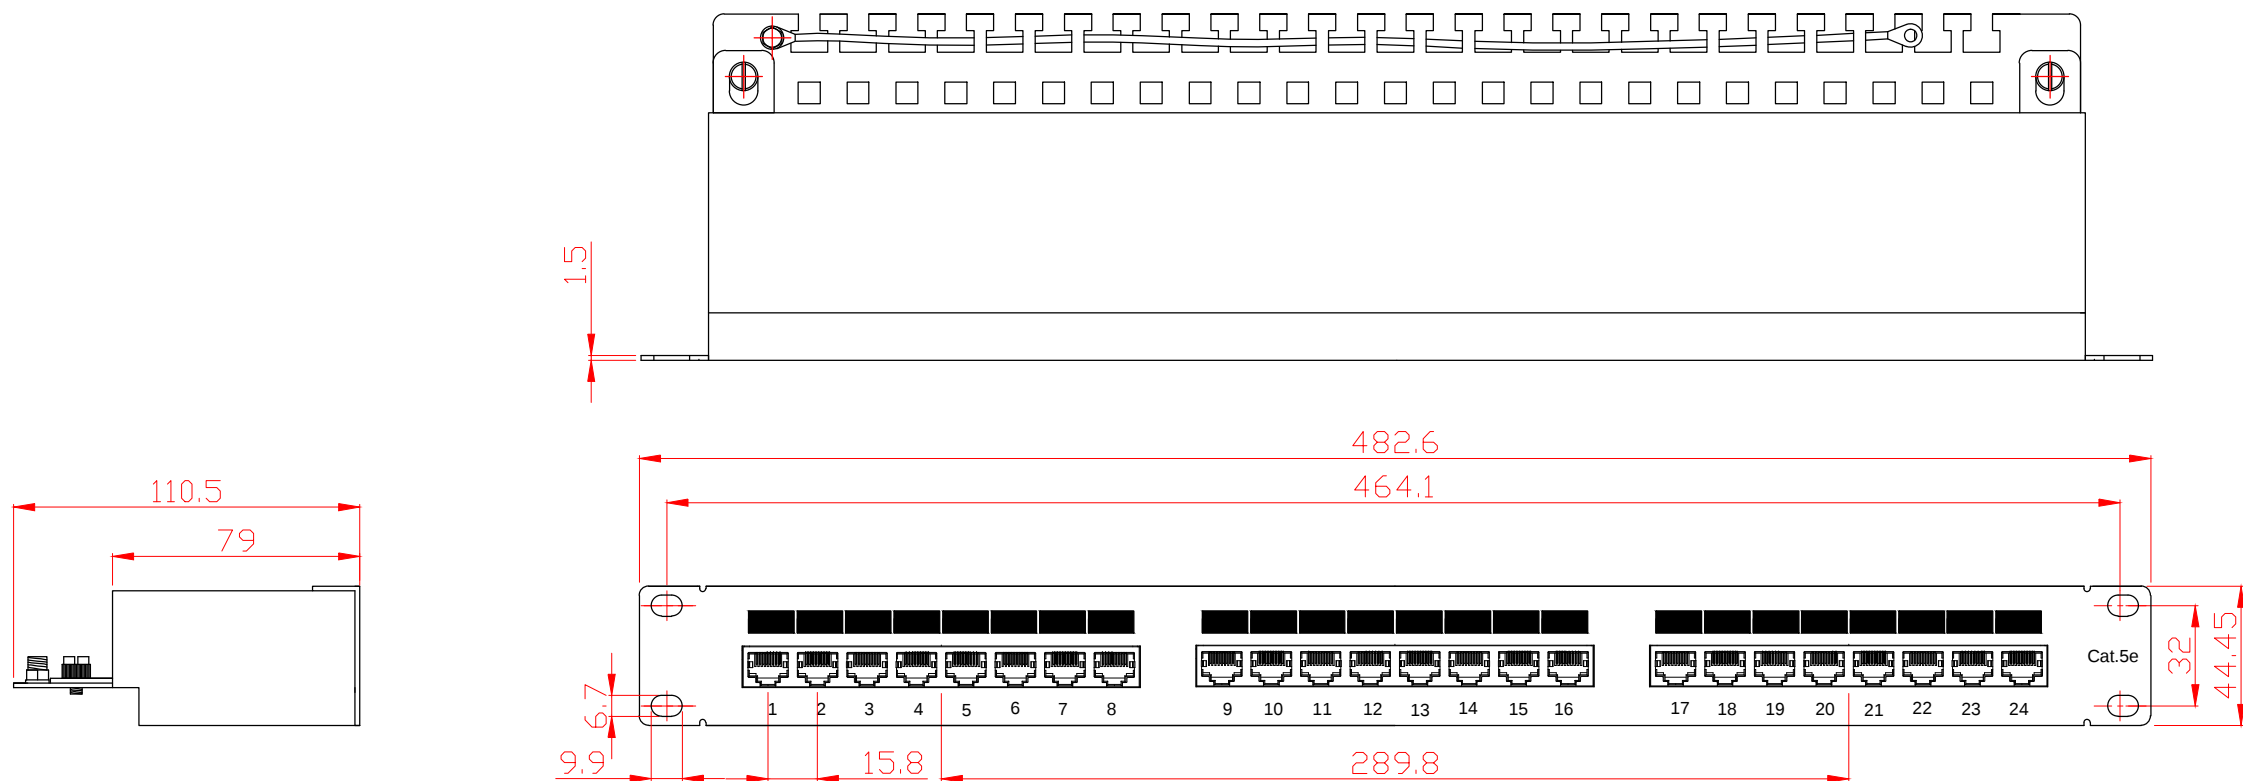


NOTES:

- ELECTRICAL:
- 1. VOLTAGE RATING:125 VAC RMS
 - 2. CURRENT RATING:1.5AMP
 - 3. CONTACT RESISTANCE:100MILLIOHMS MAX
 - 4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
 - 5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

- ENVIRONMENTAL:
- 1. STORAGE:-40° TO +85°
 - 2. OPERATION:0° TO 70°

- MECHANICAL:
- 1. HOUSING MATERIAL:PBT;
 - 2. SHIELD MATERIAL:STAINLESSSTEEL, T=0.2mm
 - 3. PANEL FRAME:CARBONSTEEL, POWDER, COATING IN BLACK COLOR, Spcc1.5mm;
 - 4. PCB MATERIAL:FR-4T=1.6mm;
 - 5. IDC MATERIAL:PC, CONTACT:PHOSPHORBRONZE; WITH NICKEL PLATING;
 - 6. RJ45 JACK LIFE:750 TIMES MIN;
 - 7. IDC LIFE:200 TIMES MIN;
 - 8. WIRE:AWG22-26;

					Solarstar Electronics Industrial Co.,Ltd.							
SYM	Number	BillNo. of Alteration	Signature	Date	Material					ItemNo.	SS-PP5-30	
					Angles Projection		Size	Scale	Unit			
Drawn	Dingjianbo		2016. 1. 13		Tolerance			A4	X:1	mm	PartName	24PortsCat5eSTPPatchPanel
Checked	Gepeijun		2016. 1. 13		0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20							
Approved	Wangweijun		2016. 1. 13		100.00-Angle ±0.25 ±30'							
				Sheet	10F1		Version: A/0		ERP PartNo.			