

Optical Fibre Cable Technical Specification

Duct Cable

GYFXTZY-8/24OM3

Yangtze Optical Fibre and Cable Joint Stock Limited Company

All rights reserved

Customer Approval			
	Name	Signature	Date
Approved by			

1. Scope

This Specification covers the design requirements and performance standard for the supply of optical fibre cable in the industry. YOFC ensures a stable quality control system for our cable products through several programs including ISO 9001, ISO 14001 and OHS.

Cable type	Application
GYFXTZY-8/24OM3	Duct installation and aerial installation together with tension strand wire

1.1 Cable Description

Optical fibres are housed in loose tubes that are made of high-modulus plastic and filled with waterproof compounds.

Two parallel FRP are placed at the two sides of the cable.

LSZH sheath are applied as outer sheath.

1.2 Reference

The cable offered by YOFC are designed, manufactured and tested according to the standards as follows:

ITU-T G.651	Characteristics of a multi-mode optical fibre
IEC 60794-1-1	Optical fibre cables-part 1-1: Generic specification-General
IEC 60794-1-21	Optical fiber cables- part1-2-Generic specification-Basic optical cable test procedure-Mechanical test methods
IEC 60794-1-22	Optical fiber cables- part1-2-Generic specification-Basic optical cable test procedure-Environmental test methods
IEC 60794-3	Optical fibre cables-part 3: Sectional specification-Outdoor cables
IEC 60794-3-10	Optical fibre cables-part 3-10: Outdoor cables-Family specification for duct and direct buried optical communication cables
IEC 60794-3-11	Optical fibre cables-Part 3-11: Outdoor cables-Detailed specification for duct and directly buried single-mode optical fibre telecommunication cables

1.3 Life Time

Optical fibre cables supplied in compliance with this specifications is capable to withstand the typical service condition for a period of twenty-five (25) years without detriment to the operation characteristics of the cable.

2. Optical Fibre

3. Optical Fibres supplied in this specification meet the requirements of ITU-T G651


Parameters		Specification				
		OM1	OM2	OM3	OM4	OM5
		62.5/125um	50/125um	50/125um	50/125um	50/125um
Attenuation after cable (dB/km)	850nm	≤3.5	≤3.0	≤3.0	≤3.0	≤3.0
	1300nm	≤1.0	≤1.0	≤1.0	≤1.0	≤1.0
Overfilled Modal Bandwidth after cable (MHz·km)	850nm	≥200	≥500	≥1500	≥3500	≥3500
	1300nm	≥500	≥500	≥500	≥500	≥500

4. Optical Cable

3.1 Technical Characteristics

- The unique second coating and stranding technology provide the fibres with enough space and bending endurance, which ensure good optical property of the fibres in the cable
- Accurate process control ensures good mechanical and temperature performance
- High quality raw material guarantees the long service life of cable

3.2 Cross Section of Cable

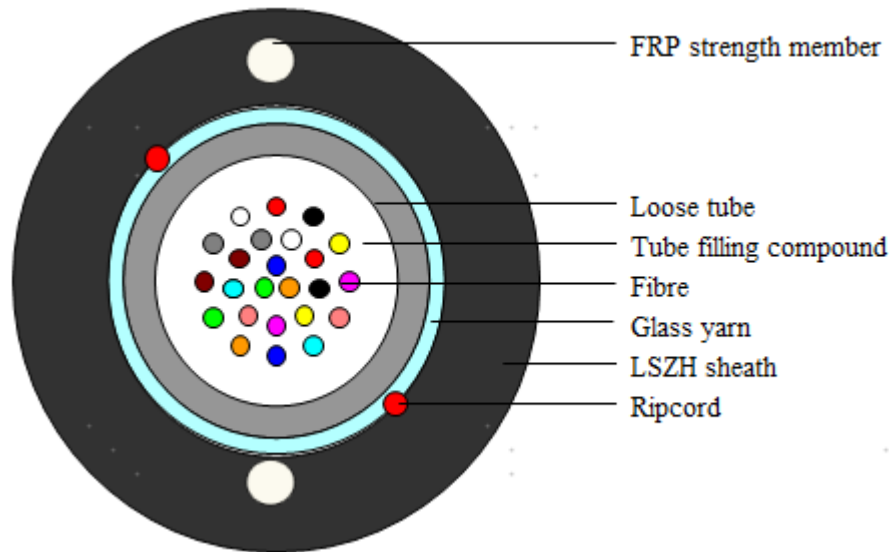

GYFXTZY-24OM3
Schematic for reference only

3.3 Fibre Identification

The color code of fibres will be identification in accordance with the following color sequence, other sequence is also available.

Fiber color code	1	2	3	4	5	6
	Blue	Orange	Green	Brown	Grey	White
	7	8	9	10	11	12
	Red	Black	Yellow	Purple	Pink	Aqua
	13	14	15	16	17	18
	Blue with black ring	Orange with black ring	Green with black ring	Brown with black ring	Grey with black ring	White with black ring
19	20	21	22	23	24	
Red with black ring	Natural	Yellow with black ring	Purple with black ring	Pink with black ring	Aqua with black ring	

3.4 Dimensions and Descriptions

The standard structure of GYFXTZY cable is shown in the following table, other structure and fibre count are also available according to customer requirements.

Item	contents	Value	
		8	24
Loose tube	Outer diameter (mm)	2.8	3.0
	Color	Natural	
Strength member	Material	FRP	
	Type	2*0.5 mm	
Peripheral strength member	Material	Glass yarn	
Sheath	Material	LSZH	
	Thickness (mm)	Nominal: 1.5	
	Color	Black	
Ripcord	Number	2	
	Color	Red	
Cable diameter(mm) Approx.		6.2	6.4
Cable weight(kg/km) Approx.		48	50

3.5 Main Mechanical and Environmental Performance

Item	Value
	8/24
Tensile performance(N)	1000
Crush(N/100mm)	1000
Operation temperature:	-30℃~+60℃
Installation temperature	-30℃~+60℃
Storage temperature	-30℃~+60℃

4. Mechanical, Physical and Environmental Test Characteristics

The mechanical and environmental performance of the cable are in accordance with the following table. Unless otherwise specified, all attenuation measurements required in this section shall be performed at 1300nm.

Items	Test Method	Requirements
Tension	<u>IEC 60794-1-21-E1</u> Load: According to 3.5 Sample length: Not less than 50m. Duration time: 1min.	Additional attenuation: $\leq 0.4\text{dB}$ after test No damage to outer jacket and inner elements
Crush	<u>IEC 60794-1-21-E3A</u> Load: According to 3.5 Duration of load: 1min	Additional attenuation: $\leq 0.4\text{dB}$ after test No damage to outer jacket and inner elements
Impact	<u>IEC 60794-1-21-E4</u> Radius: 300 mm Impact energy: 10 J Impact number: 1 Impact points: 3	Additional attenuation: $\leq 0.4\text{dB}$ No damage to outer jacket and inner elements
Bend	<u>IEC 60794-1-21-E11A</u> Mandrel radius: $10 \times D$ Turns:4 Cycles:3	Additional attenuation: $\leq 0.4\text{dB}$ No damage to outer jacket and inner elements
Repeated bending	<u>IEC 60794-1-21-E6</u> Bending radius: $20 \times D$ Cycles: 25 Load: 150N	Additional attenuation: $\leq 0.4\text{dB}$ No damage to outer jacket and inner elements
Torsion	<u>IEC 60794-1-21-E7</u> Cycles:10 Length under test: 1m Turns: $\pm 180^\circ$ Load: 150N	Additional attenuation: $\leq 0.4\text{dB}$ No damage to outer jacket and inner elements
Water Penetration	<u>IEC 60794-1-22-F5B</u> Time : 24 hours Sample length : 3m Water height : 1m	No water leakage.
Temperature cycling	<u>IEC 60794-1-22-F1</u> Sample length: at least 1000m Temperature range: $-30^\circ\text{C} \sim +60^\circ\text{C}$ Cycles: 2 Temperature cycling test dwell time: 12 hours	The change in attenuation coefficient shall be less than 0.4dB/km .
Other parameters	According to <u>IEC 60794-1</u>	

5. Packaging and Drum

5.1 Cable Sheath Marking

Unless otherwise specified, the cable sheath marking shall be as follows:

- Color: white
- Contents: YOFC, the year of manufacture, the type of cable, cable number, length marking
- Interval: 1 m

Outer sheath marking legend can be changed according to user's requests.

5.2 Reel Length

Standard reel length: 2/3/4 km/reel, other length is also available.

5.3 Cable Drum

The cables are packed in fumigated wooden drums.

5.4 Cable Packing

Both ends of the cable will be sealed with suitable plastic caps to prevent the entry of moisture during shipping, handling and storage. The inner end is available for testing.