



- WIRING PIN ASSIGNMENT:
 P1 EIA/TIA 568-B.2 P2
- 1 WH/OR 1
 - 2 ORANGE 2
 - 3 WH/GR 3
 - 4 BLUE 4
 - 5 WH/BL 5
 - 6 GREEN 6
 - 7 WH/BR 7
 - 8 BROWN 8

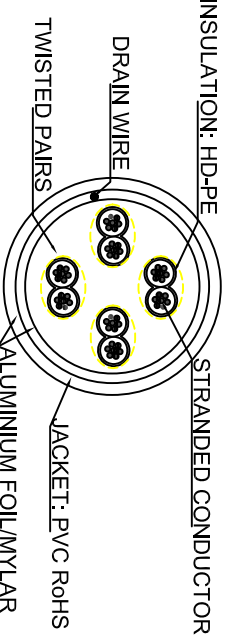

- NOTE:
 1. 100% OPEN/SHORT, MISSWIRING AND INTERMITTENCE TEST
 2. ROHS COMPLIANT, ALL MATERIAL AND PROCESS MUST MEET THE REQUIREMENT OF ROHS
 3. 100% PASS 300V HIGH VOLTAGE TEST

CAT5E FTP CABLE WHITE		
PART No.	LENGTH	TOLERANCE
	500	±15
	1000	±20
	2000	±25
	3000	±25
	5000	±30



- SHELL TWISTED PAIRS SHELL
- 1 CONNECTOR 8P8C RJ45, 1μ GOLD PLATED AT CONTACT AREA
 - 2 IRONCLAD SHELL NICKEL PLATE
 - 3 INJECTION 60P PVC LIGHT GREY COLOR
 - 4 OVERMOLD VICENRAY CU CAT5E FTP CABLE T1A/E1A 568B 24AWG/4PRS
 - 5 PRINTING CAT5E FTP CABLE 24AWG 7/0.18BC*4P.GREY COLOR
 - 6 RAW CABLE
 - 7 CAT5E FTP CABLE 24AWG 7/0.18BC*4P.GREY COLOR
 - 8 ITEM

X:±1	X:±1
.X±0.3	.X°±
.XXX±0.100	.XXX°±
UNITS:	mm

CUSTOENR:WS

TITLE:
 CAT5E FTP Patch Cable

- TEST DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIDER CABLE AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF WIDER CABLE.

APPD:
 CHKD: JENNY ZENG
 DRAW: SIMON WU

RoHS COMPLIANT
 DATE: 2015-06-26


8	7	6	5	4	3	2	1
LENGTH±T							
PRINT: VICENRAY CU CAT5E FTP CABLE T1A/E1A 568B 24AWG/4PRS							
CAT5E FTP CABLE WHITE							
PART No. LENGTH TOLERANCE							
500 ±15							
1000 ±20							
2000 ±25							
3000 ±25							
5000 ±30							
RoHS COMPLIANT DATE: 2015-06-26							
SCALE SHEET REV. 1:1 1/1 C							

Product Specifications

Construction & Material :

Item	Unit	Specification
Product		CAT5e FTP
Conductor	Size(导体)	AWG 24
	Number (数目)	P 4
	Material(材质)	BC
	Construction(铜线)	pcs/mm 7/0.18±0.005
	Diameter(绞合直径)	mm 0.61
Insulation	Material(材质)	HD-PE
	Min. thickness(最小厚度)	mm 0.2
	Avg. thickness(平均厚度)	mm 0.21
	Diameter(线径)	mm 0.92±-0.05MM
	Color(颜色)	Blue×White/Blue Orange×White/Orange Green×White/Green Brown×White/Brown
Twisting	Construction	See Cross-Section
Cabling	Construction	See Cross-Section
Taping	Material(包带)	AL-Foi/Mylar
Drain Wire	Material(材质)	TCCS
	Construction(铜线)	pcs/m m 7/0.16
Jacket	Jacket	PVC
	Min. thickness(最小厚度)mm	0.45
	Avg. thickness(平均厚度)mm	0.55
	Overall Diameter(线径)	mm 5.7±0.15
	Color(颜色)	LIGHT GREY 浅灰色
VICENRAY CU CAT5E FTP CABLE TIA/EIA 568B 24AWG/4PRS		

Cross - Section View :

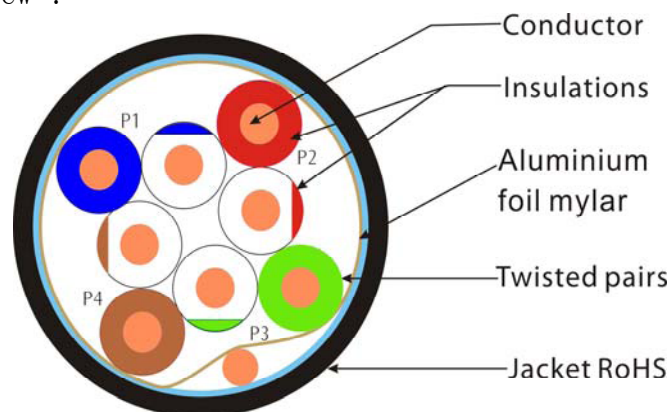

NOTE: Please confirmed in tws,oda we will take it as confirmed.

