

| REV      | DATE | MODIFICATION | DRAWN |
|----------|------|--------------|-------|
| 05/08/09 |      |              |       |

环保

SPECIFICATIONS

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.  
DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.  
INSULATION RESISTANCE: 100M  $\Omega$ .  
TERMINATION: RESISTANCE 20m  $\Omega$  MAX AFTER ENVIRONMENTAL TESTING.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20POUND MIN.  
DURABILITY : 200 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.  
COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.  
CONTACT BLADE: COPPER ALLOY.  
CONDUCTOR : STRANDED & SOLID WIRE .24AWG, 26 AWG.  
(It can be used for the wire OD from0.096~01.02)  
GOLD PLATING: 3u"~50u" ARE AVAILABLE.

规范

1.电器:

UL应用最大250VOLTS AC.  
介质耐电压伏特数 :500VOLTS AC.  
绝缘阻抗:100百万欧姆.  
终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2.机构

拉力测试:至少20磅.  
耐力测试:至少200次之插拔测试.





3.材质表面处理

塑胶壳:聚碳酸酯,UL-94V-0 or UL94V-2.  
颜色:透明,或者其他颜色亦可.  
金片:铜合金.  
导体:多股线&单股线,24AWG,26AWG.  
(芯线直径:0.096~01.02均可适用)  
镀金厚度:3u"~50u",皆可提供.

客户用产品图



|                                                                   |                        |                 |                        |
|-------------------------------------------------------------------|------------------------|-----------------|------------------------|
| <b>EXW</b> 卓新工业股份有限公司<br>EXCELLENCE WIRE IND CO.,LTD              |                        | 材 质<br>MATERIAL | 图 号<br>DWG NO.         |
| DIMENSION IN mm (inch)<br>TOLERANCE UNLESS<br>OTHERWISE SPECIFIED |                        | PC              | PLUG-123               |
| .X $\pm$ 0.20                                                     | .X $\pm$ 5 $^{\circ}$  | 名称<br>TITLE     | 10P10C UTP-key(隔栏0.30) |
| .XX $\pm$ 0.10                                                    | .XX $\pm$ 2 $^{\circ}$ | 制 图<br>DRAWN    | LiWenjuan              |
| 审 核<br>APPROVAL                                                   | 核 对<br>CHECKED         | 比 例<br>SCALE    | 2/1                    |
| 沈红波                                                               | 钟均江                    | 角 注<br>PROJ.    | 张 数<br>SHEET           |
|                                                                   |                        | 更 改<br>REV      | D                      |

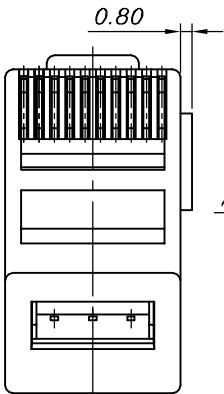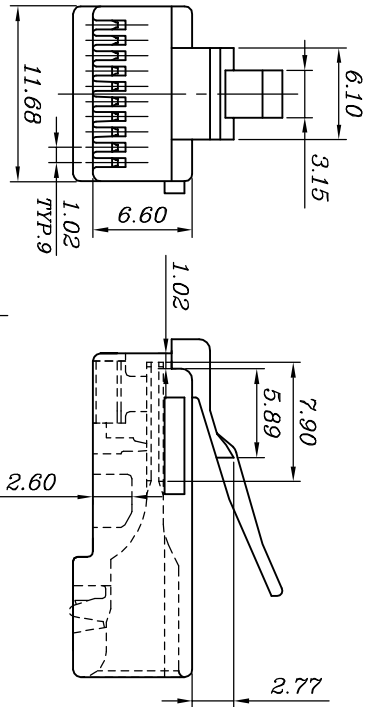

Round

ITEM: P00RV2

|              |      |     |     |      |            |       |
|--------------|------|-----|-----|------|------------|-------|
| BLADE:       | E    | EB  | Y   | YB   | Z          | A     |
| Drawing      |      |     |     |      |            |       |
| Mark         |      |     |     |      |            |       |
| GOLD PLATING | 3Mu" | 3u" | 6u" | 15u" | 30u"       | 50u"  |
| Mark         |      |     |     |      | CABLE TYPE | ROUND |